




Since 1966



SK VALVES

CROSS EXTENSION JOINTS WITH STRAINER

拉桿伸縮十字濾管

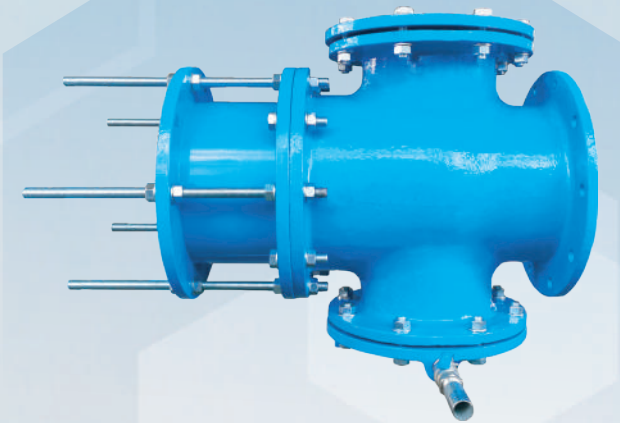

叶光閥業股份有限公司 SHYE KUANG VALVES MFG CO.,LTD.
恩盈企業股份有限公司 EN IN ENTERPRISE CO.,LTD.

■ 總公司 Headquarter
923屏東縣萬巒鄉佳興路83號 No. 83, Chia-Hsing Rd., Wan-Luan, Pingtung 923, Taiwan R.O.C.
TEL : +886-8-783-3834 FAX : +886-8-783-3734 Skype: skvalve.andrew
E-mail: international@skvalves.com.tw

■ 北區辦公室 North Taiwan Office
241新北市三重區環河北路三段270號1樓
No. 270, Sec. 3, Huanhe N. Rd., Sanchong Dist., New Taipei City 241076, Taiwan R.O.C.
TEL : +886-2-2988-4657 FAX : +886-2-2988-4657



www.skvalves.com.tw

■ 本公司對型錄所列之材質與尺寸保留認為必要時作修改之權利。或依客戶需求設計。實際尺寸及材質仍以客戶訂購時所提供之圖說為準。

SK Valves reserves the right to modify the materials or/and dimensions of the products as provided hereunder from time to time if necessary, or in accordance with the request of clients. The actual dimensions or/and material used are subject to the customer's request after placing the order.

Cross extension joints with strainer

十字濾管

This equipment is suitable for installation in front of various hydraulic automatic valves (such as pressure reducing valves, pressure relief valves, pressure sustaining valves, remote control float valves, etc.), providing sedimentation and coarse filtration to prevent debris from clogging the valve body. It also features a pull rod telescopic joint among its functions.

本設備適合裝置於各類水力自動閥 (如減壓, 洩壓, 持壓, 遙控浮球閥等)之閥前, 以兼具沉澱、粗濾以防止雜物淤塞於閥體及具有拉桿伸縮接頭等功能。

十字濾管種類(Cross extension joints with strainer type)

- 一般型：提供基本過濾、管道伸縮調節功能


General type : Provide basic filtration and pipeline expansion adjustment functions.

- 整流型：除了具備一般型功能外，加入整流結構，可使流體在進入主系統前流速均勻化、降低湍流與壓力損失。


Rectification type : In addition to the standard functions, a rectifier structure is added to ensure uniform fluid velocity before entering the main system, reducing turbulence and pressure loss.



一般型

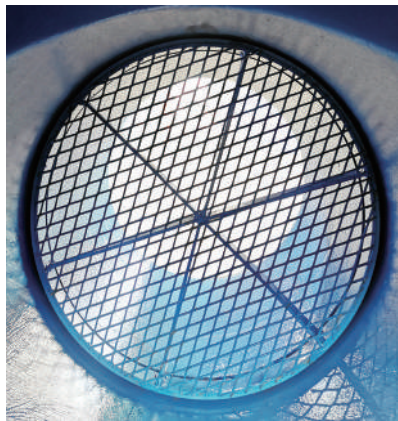

整流型

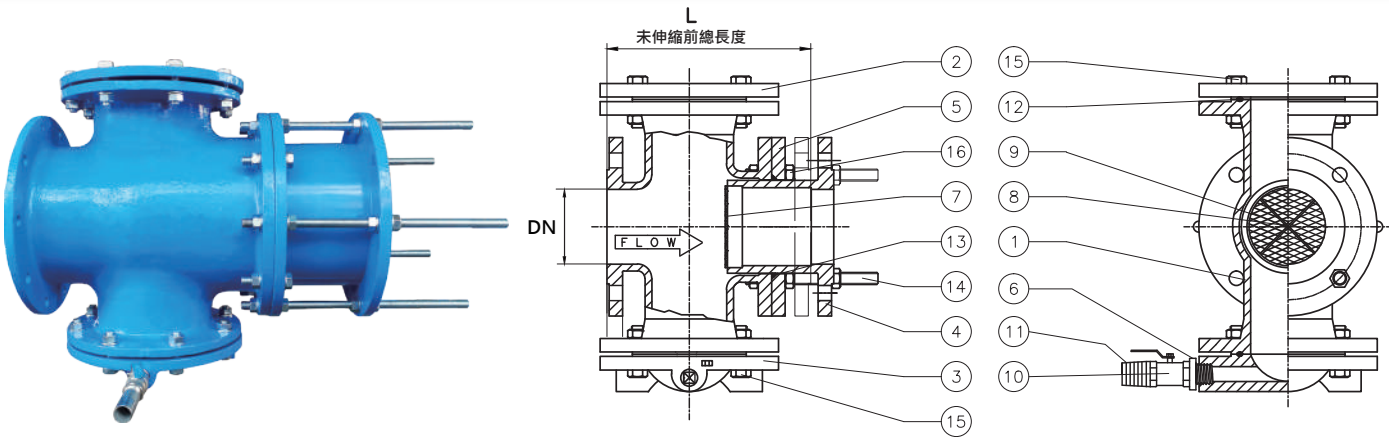

PARTS LIST & MATERIAL 構造材質

項次	主要組件	材質
01	本體	延性鑄鐵 FCD450 鑄不銹鋼 SCS13
02	頂蓋	延性鑄鐵 FCD450 鑄不銹鋼 SCS13
03	底蓋	延性鑄鐵 FCD450 鑄不銹鋼 SCS13
04	伸縮管	延性鑄鐵 FCD450 鑄不銹鋼 SCS13
05	止水壓環	延性鑄鐵 FCD450 鑄不銹鋼 SCS13
06	排泥軟管接頭	不銹鋼 SUS304
07	濾網	不銹鋼 SUS304
08	濾網支撐板	不銹鋼 SUS304
09	濾網固定線	不銹鋼 SUS304
10	排泥閥	青銅 BC6
11	排泥管	不銹鋼 SUS304
12	盲蓋止水膠圈	高級橡膠N.B.R
13	伸縮管止水膠圈	高級橡膠N.B.R
14	伸縮拉桿	鍍鋅螺桿
15	頂底蓋螺絲連帽	鍍鋅螺栓
16	壓環螺絲連帽	鍍鋅螺栓

DIMENSION 尺寸表 Unit : mm

DIM. SIZE	DN	L	Contraction 收縮量	Expansion 伸長量
			min	min
50	50	260	20	20
75	75	280	20	20
100	100	300	20	20
150	150	425	20	20
200	200	500	40	40
250	250	650	80	80
300	300	750	125	125
350	350	875	150	150
400	400	1000	160	160
450	450	1125	175	175
500	500	1250	175	175
600	600	1500	175	175
700	700	1750	175	175
750	750	1750	175	175
800	800	2000	175	175
900	900	2250	175	175
1000	1000	2500	175	175
1200	1200	2500	175	175
1350	1350	2500	175	175
1500	1500	2500	175	175
1800	1800	2500	175	175
2000	2000	2500	200	200